



Multifunctional tap
dispenser

Firewall[®] Tap 4.0

A high-end, multi-functional tap
dispenser for thoroughly purified water

- Premium aesthetics, high quality materials and advanced touch-free technologies make this dispenser the perfect complement for first-class workplaces.
- Firewall[®] safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Can be paired with most under-the-counter boxes to accommodate the diverse hydration needs of users.



Product features and benefits



Cutting-edge design and user experience

Built with high quality, carefully selected materials, such as stainless steel, zinc alloy and tempered glass for elegant aesthetics and durability.

Convenient built-in font with grill for drainage prevents overflow from excess water spillage.

Waterfall indicator facilitates accurate vessel positioning for precise dispensing.

The 273 mm dispensing gap can accommodate a variety of vessels, including bottles and carafes.

Its simple and intuitive design allows the user to choose between four types of water, either by using the touch panel or the IR (infra-red) touch-free functionality.

Can be paired with most under-the counter boxes, of different dispensing capacities, to satisfy all users' hydration needs.

1.8
L/M

FLOW RATE



Top hygiene innovations

Patented and certified Firewall® UVC purification system thoroughly purifies the water deactivating pathogens for microbiologically safe water. Guaranteed free from: up to 99.9999% bacteria, 99.99% viruses and 99.9% cysts. The Firewall UV lamp monitoring system ensures the technology always works at peak performance, guaranteeing consistent standards of water purification.


The water spout is infused with BioCote® technology, a silver ion additive able to inhibit microbial growth on the product's surfaces.

up to
99.9999%
pathogens free

Firewall® UVC purification technology thoroughly purifies the water all the way through to the point of dispense



Technical specifications

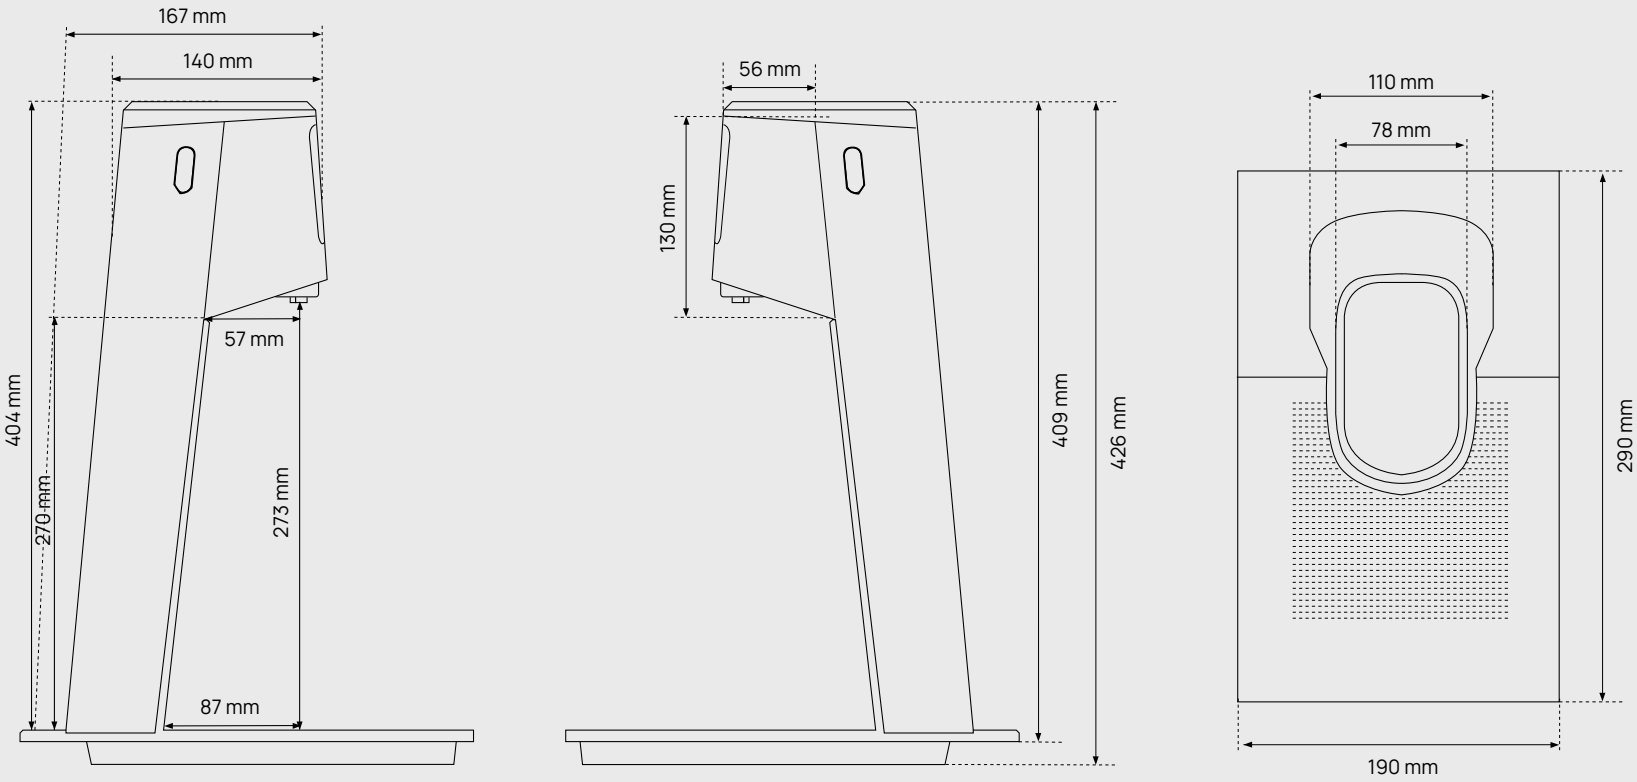

Water options

Ambient	Cold	Sparkling	Hot
			

Specifications

Model	Integrated tap dispenser	Integrated tap dispenser + font
Dimensions	110 mm (W) x 167 mm (D) x 404 mm (H)	190 mm (W) x 290 mm (D) x 426 mm (H)
Weight	4 Kg (net) 4.6 Kg (gross)	
Dispensing area height	273 mm	

Technology and performance

Water purification system	Firewall® UVC technology
Recommended filtration*	Carbon Block (external installation, not included with the product)
Dispensing capacity (flow rate)	1.8 L/m
Operating pressure	3 bar
Max electrical consumption	13 W

Installations requirements

Power supply	120 - 220 - 240 V / 50 Hz - 60 Hz
Water connection	1/4"

*Filtration system may vary depending on incoming water conditions.



culligan.ie
1800 266 537 (Ireland) / 0800 1026 349 (Northern Ireland)
sales@culligan.ie



Firewall technology is certified
by IAPMO R&T to NSF/ANSI
55 Class A, NSF P231, US EPA
Microbiological Guide Standard,
NSF/ANSI 372 and CSA B483.1.



Culligan reserve the right, in order to reflect continuous research and development, to amend or change specifications without prior notice.
Culligan and the Culligan logo are trademarks in countries where the Group operates. Culligan licensed to use BioCote, and BioCote logo which are registered trademarks of BioCote Ltd.